



Richter Lined Sealless ANSI/ASME Pump MNKA

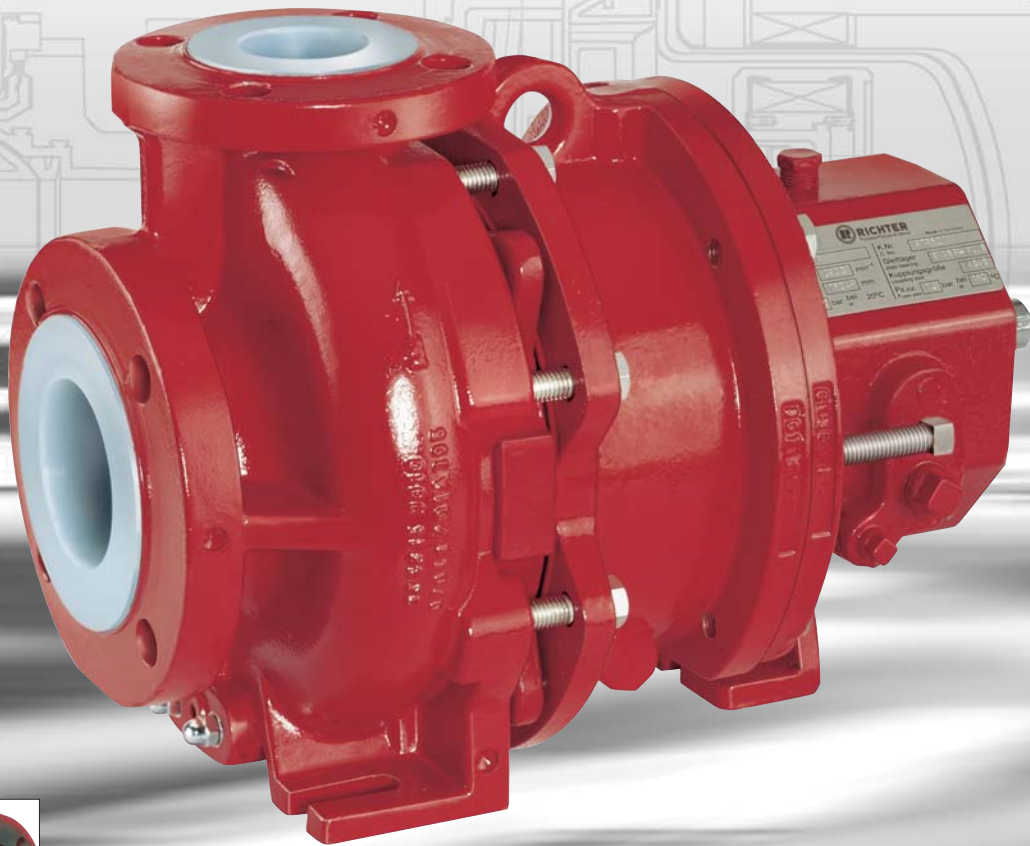

Dry-run optimized
SAFEGLIDE® PLUS sleeve bearings

Corrosion-resistant PFA/PTFE

High and low temperature

Richter lined sealless ANSI/ASME chemical pump MNKA, magnetic drive

Applications

Corrosive, hazardous, polluted and pure media in chemical, pharmaceutical, petrochemical, water treatment, pulp and metal processing, and waste disposal/recycling industries.

Operating range

- Flows to 400 US gpm (95 m³/h)
- Heads to 480 feet (146 m)
- Temperatures to 360 °F (180 °C)
- Pressures to 275 psig (19 bar)

Examples of services

- | | |
|------------------------|-----------------------|
| • Hot acids | • Dichloroethylene |
| • Nitric acid | • Chlorine dioxide |
| • Acetic acid | • Sodium hypochlorite |
| • Hydrofluoric acid | • Freon 113 |
| • Amines | • Ethers |
| • Chlorinated solvents | • Acetone |
| • Carbon tetrachloride | • Bromine |
| • Chloroform | • CIP solutions |

Design

Single-stage, plastic-lined, magnetic drive chemical duty centrifugal pump. Dimensions and performance data to ASME B73.3 and ANSI CL. 150

Performance features for chemical services

Extended pump life

- Virgin PFA lining
- Sealless robust design
- PFA lined solid 316 stainless steel shaft
- Optional SAFEGLIDE® PLUS sleeve bearings

Optimum performance

- Efficiency 30 % higher than metal sealless pumps
- Low NPSHr
- Non-slip synchronous drive with neodymium iron boron outer magnets and samarium cobalt inner magnets
- Optional samarium cobalt outer magnets for high temperatures

Ease of maintenance

- Minimum number of parts, back pull out design
- Minimum maintenance, no mechanical seal

Safety

- Containment shell protection through drive magnet assembly bump ring
- Casing drain connection
- Zero emissions

The heavy-duty design, Richter SAFEGLIDE® PLUS silicon carbide sleeve bearings and the eddy current-free PTFE/CFRP containment shell provide an unmatched level of operational safety. The MNKA complies with ANSI and ASME B73.3 for 60 Hz and 50 Hz applications.

- ⑩ Ductile cast iron pump casing (ASTM A395) absorbs all pipe loads.

Thick-walled PFA lining of min. 0.2" (5 mm) universally protects against corrosion. See page 6.

Optional PFA-L antistatic lining and PFA-P lining for extremely permeating fluids.

- ⑨ Hydraulically optimized flow path


- enclosed impeller with large metallic core and integral shaft.
- No suction-side spider obstructing inlet flow.
- Low NPSHr.
- Volute design.

- ⑧ Radial rubbing safety ring (bump ring)

protects containment shell from a possibly wobbling drive magnet unit in the event of defective ball bearing. Non-sparking optional, see page 6.

Solids handling

The standard MNKA can handle solids contents up to 2 % and particle sizes up to 0.078" (2 mm). Optional bearing flush using clean external liquid permits higher solids contents. Contact factory when solids occur.

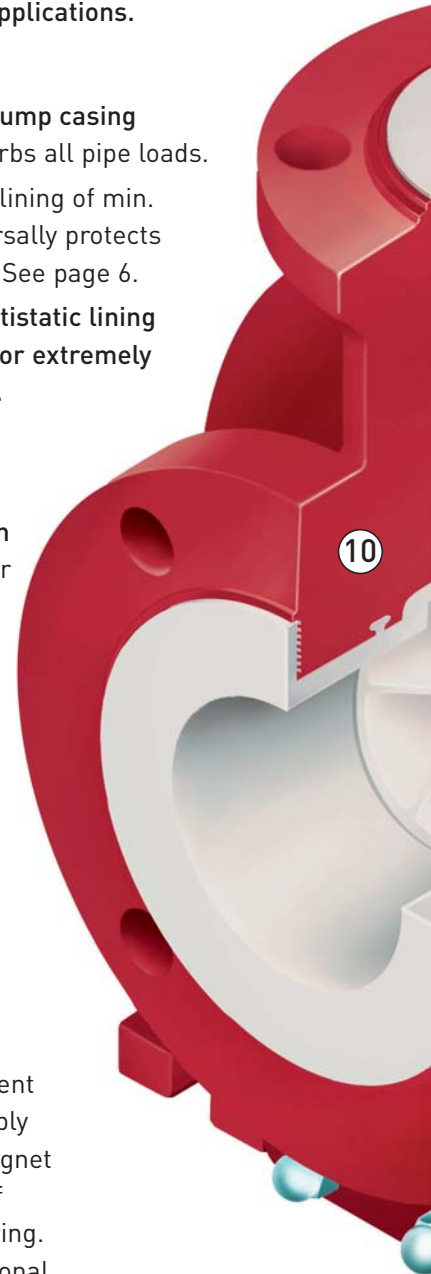

① **Large sleeve bearings exceed design requirements.**


Choice of

- hard carbon vs. SSiC
- SSiC vs. SSiC

SSiC vs. SSiC silicon carbide sleeve bearings are available with **SAFEGLIDE® PLUS dry run protection**. This feature reduces the

friction by appr. 85% and reliably protects the pump from dry run damages. For more info see special brochure.

Hard carbon vs. SSiC offers a limited dry run capability.

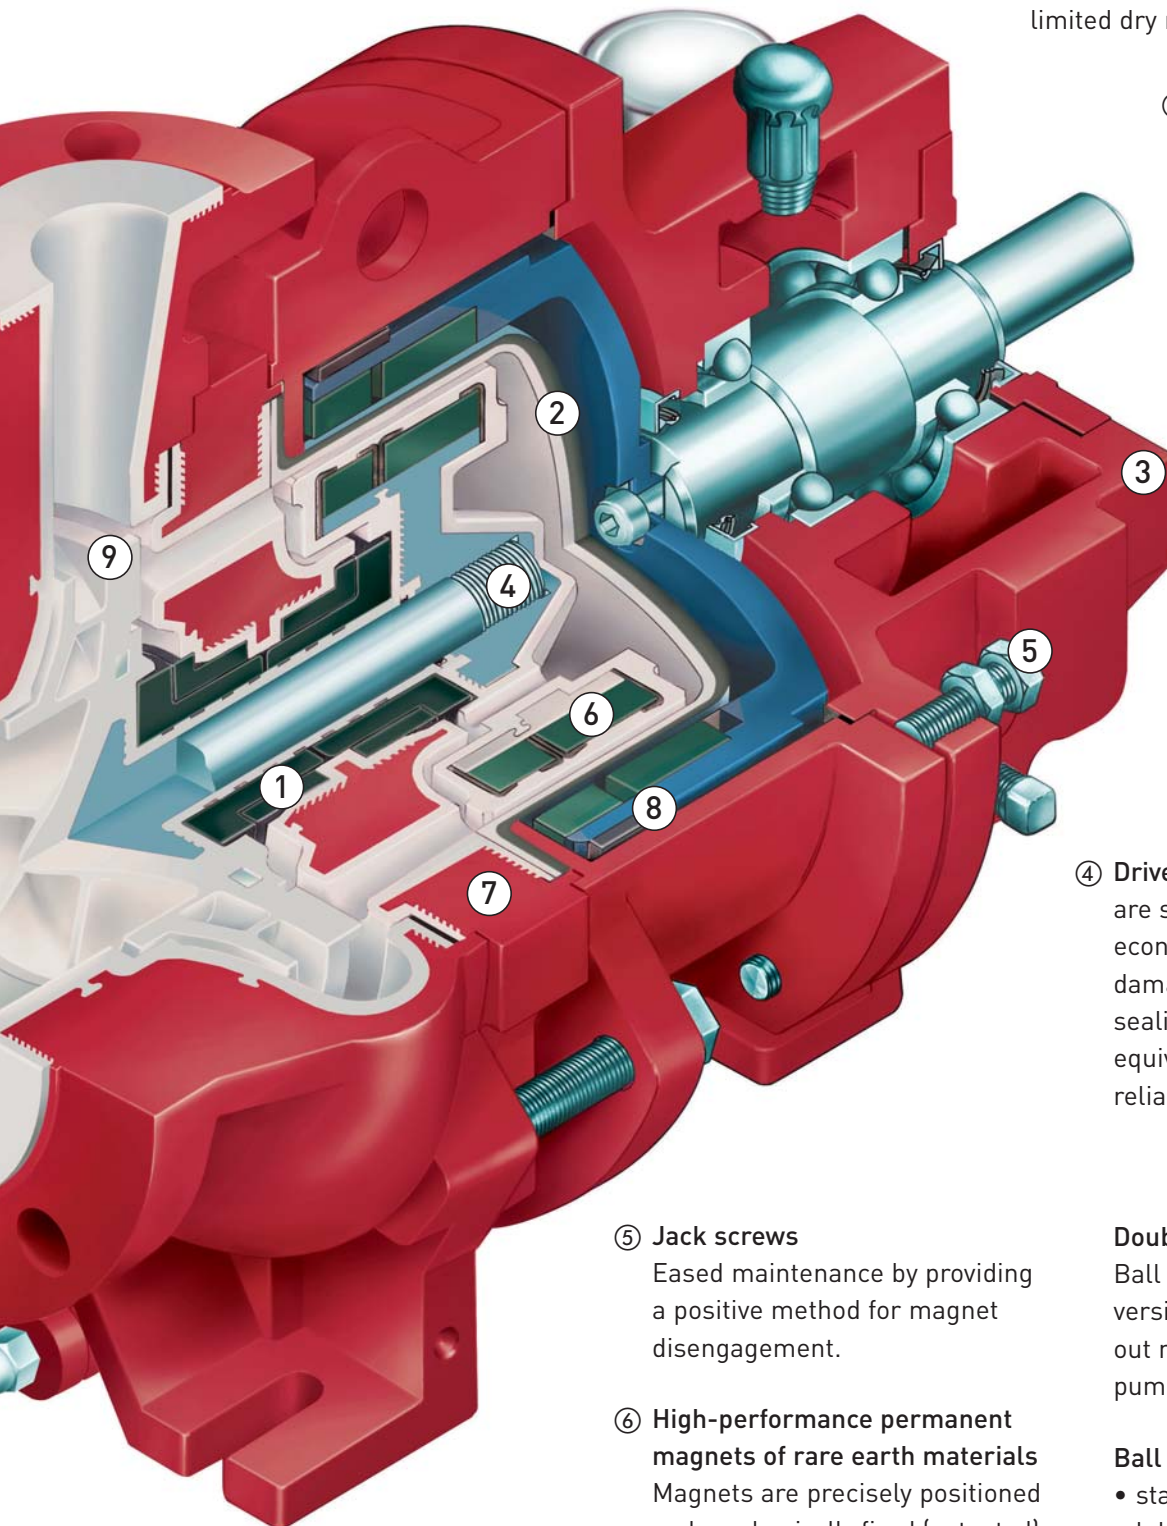

② **Eddy current-free non-metallic containment shell:**

- inside virgin PTFE
- outside carbon-fibre reinforced plastic (CFRP) with high secondary corrosion-resistance.

No generation of heat: reduces minimum flow requirement and saves energy. High vacuum proof version optional.

③ **Tertiary sealing**

to atmosphere by means of lantern/bearing pedestal unit. No vent holes.

④ **Driven magnet rotor and impeller**

are separate parts to allow economical exchange in case of damage. Only one statically sealing O-ring of Kalrez® (or equivalent) provides proven reliability.

⑤ **Jack screws**

Eased maintenance by providing a positive method for magnet disengagement.

⑥ **High-performance permanent magnets of rare earth materials**

Magnets are precisely positioned and mechanically fixed (patented). Transferable torques of 9.6 to max. 103 lbs.ft (13 to 140 Nm) result in magnetic coupling power ratings of up to 69 hp (51 kW) at 3500 rpm or 57 hp (42 kW) at 2900 rpm. For smaller and for larger pumps see series MNK.

Double back pull-out design

Ball bearings of frame-mounted version can be maintained without need to drain or remove the pump.

Ball bearings

- standard: oil lubrication with labyrinth seals
 - option: greased for life.
- No hydraulic forces act on the drive shaft and the ball bearings, as the shaft drives only the drive magnet assembly. Thus these components are ensured of a long service life.

⑦ **Heavy duty bearing pedestal with metallic core**

supports the whole wetted rotating unit. Containment shell does not have to support loads as with light duty pump designs.

Parts and material list

Additional features and options

Casing drain

available as an option:

- allows for safe and easy pump drainage
- for standstill conditions especially with crystallizing media

Casing drain provides a flushing circuit via the lowest point of the pump.

External corrosion protection

- epoxy coating
- casing fasteners of stainless steel

Quality

Quality system to ISO 9001.

Temperature monitoring

Available as an option, measuring the liquid's temperature.

Type code:

magnetic drive pump, frame-mounted

MNKA/...

magnetic drive pump, close-coupled

MNKA-B/...

lining PFA

.../F

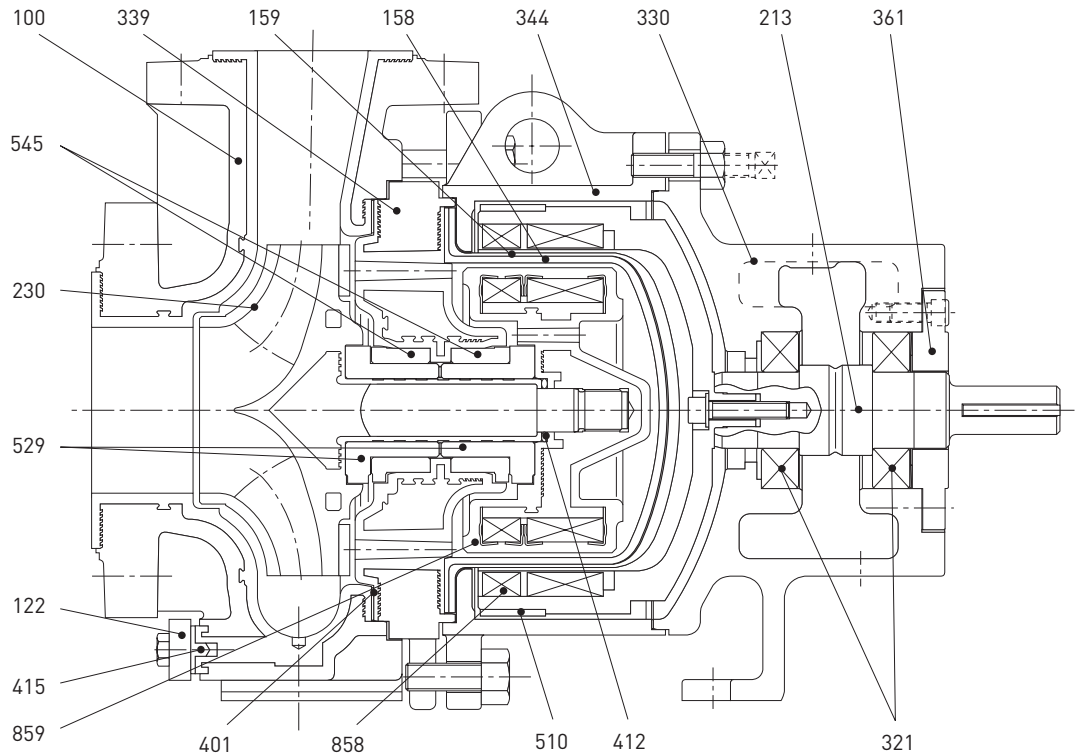


Illustration: Frame-mounted pump with oil bath lubrication.
Not shown: grease lubrication and close-coupled pump.

Parts and materials

Item No.	Designation	Material
100	Casing (housing)	D.I. ASTM A 395/PFA ¹⁾
122	Cover flange ²⁾	Steel
158	Containment shell (can) insert	PTFE
159	Containment shell (separating can)	Carbon-fibre reinforced plastic (CFRP)
213	Drive shaft	Steel
216	Hollow drive shaft (close-coupled pump, not illustrated)	Steel
230	Impeller with integrated shaft	PFA with SS/steel core
321	Radial ball bearing	oil lubrication (greased optional)
330	Bearing pedestal	D.I. ASTM A 395
339	Bearing pedestal	D.I. ASTM A 395/PFA ¹⁾
344	Lantern	D.I. ASTM A 395
346	Adapter (close-coupled pump, not illustrated)	D.I. ASTM A 395
361	Bearing cover	Steel
401	Casing gasket	PTFE
412	O-ring	FFKM (Kalrez® or equivalent)
415	Centering gasket ²⁾	PTFE
510	Bump ring (radial safety rubbing ring)	Integral to part 858, optional non-sparking
529 / 545	Sleeve bearing set (plain bearing set) consisting of bearing sleeve + bearing bush	SSiC silicon carbide/hard carbon, optionally SSiC/SSiC or SSiC/SSiC with SAFEGLIDE® PLUS
858	Drive magnet assembly	D.I. ASTM A 395, NdFeB magnets, opt. SmCo
859	Inner magnet assembly	Steel/PFA ¹⁾ , SmCo magnets


¹⁾ PP/PE-UHMW, antistatic and highly permeation resistant linings on request

²⁾ casing drain optional

Viton® and Kalrez®: TM of DuPont

SAFEGLIDE® and Richter: TM of Richter Chemie-Technik GmbH


Modular interchangeability

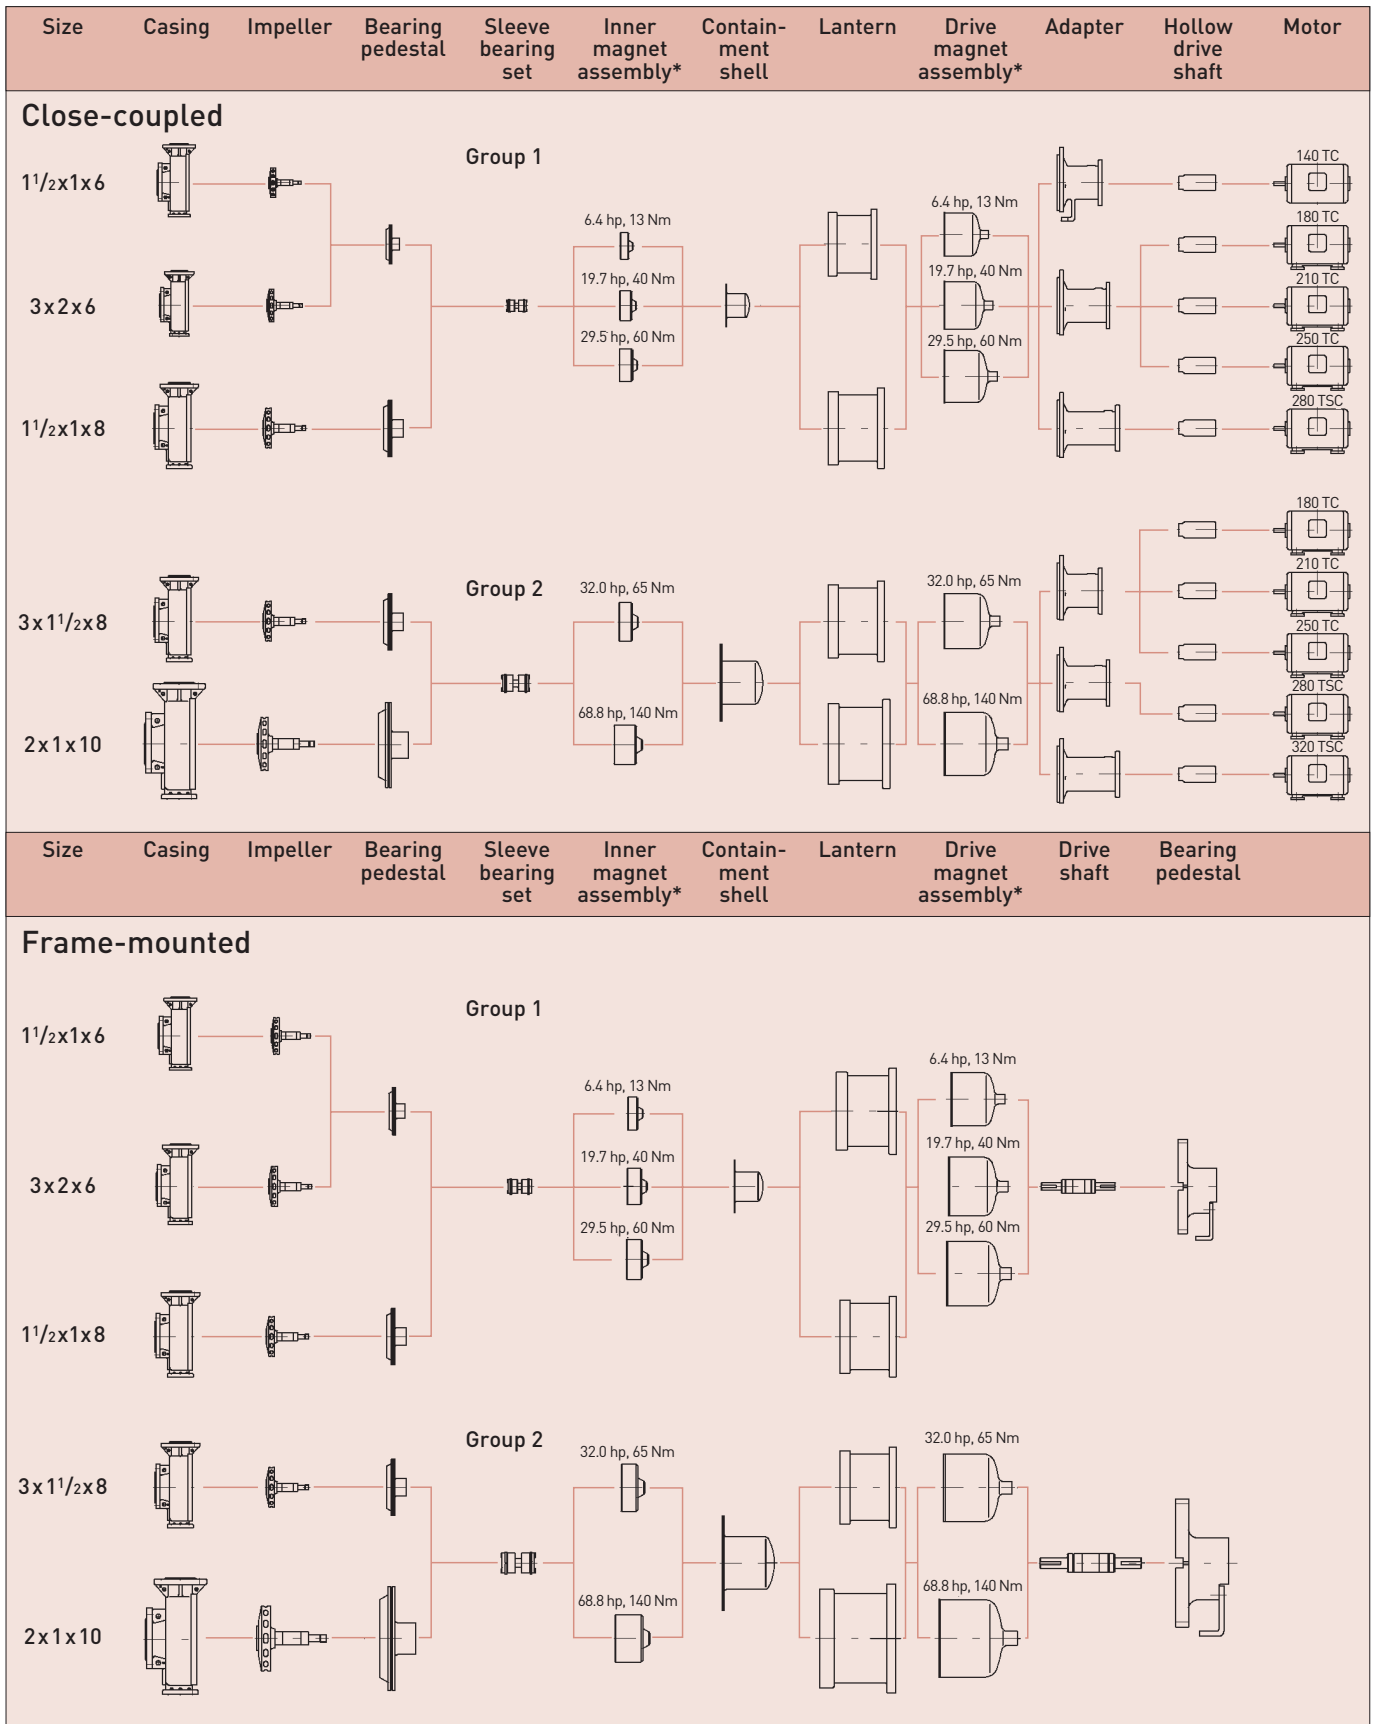

*Magnetic drive ratings (Nm) at 3500 rpm

The MNKA in detail: built for outstanding service life

Optional SAFEGLIDE® PLUS silicon carbide (SSiC) sleeve bearings provide **dry-run capability**. That helps to overcome short-term upsets and gives valuable time to make corrections before pump damage occurs (see separate brochure!).

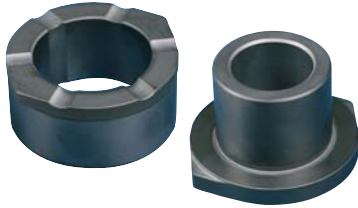

SSiC sleeve bearings

One-piece enclosed trimable impeller

with integral shaft. Minimized axial thrust. Stable metal core and thick walled lining contribute to long service life.



Trimable impeller

Radial rubbing safety ring („bump ring“):

no danger for the containment shell even in the unlikely event of a failure of the ball bearings. Shown: optional non-sparking ring.



Bump Ring

Dual non-metallic containment shells as standard, avoid eddy current losses and increase efficiency and operational safety. Also available in vacuum-proof version.



Containment shell


Tough **all-metal external pump casing** absorbs hydraulic loads and those from suction and discharge piping. Unlike non-armoured plastic pumps, no expansion joints are necessary. **Min. 0.2" (5 mm) thick PFA lining**.



PFA lined pump casing

Fully contained flat PTFE gasket

provides superior corrosion resistance compared to an O-ring of FKM (e.g. Viton®) and is more reliable than a PFA/PTFE encapsulated FKM O-ring. All sealing surfaces are backed by metal to „limit“ flow of plastic.




MNKA also in close-coupled design: MNKA-B

Installation flexibility

The MNKA is available in frame-mounted or close-coupled designs for maximum installation or pump replacement flexibility.

ANSI pump replacement

Since the MNKA meets ANSI dimensional standards, retrofitting mechanically sealed ANSI pumps is easy: Simply replace the old pump with the equivalent frame-mounted MNKA or close-coupled MNKA-B.

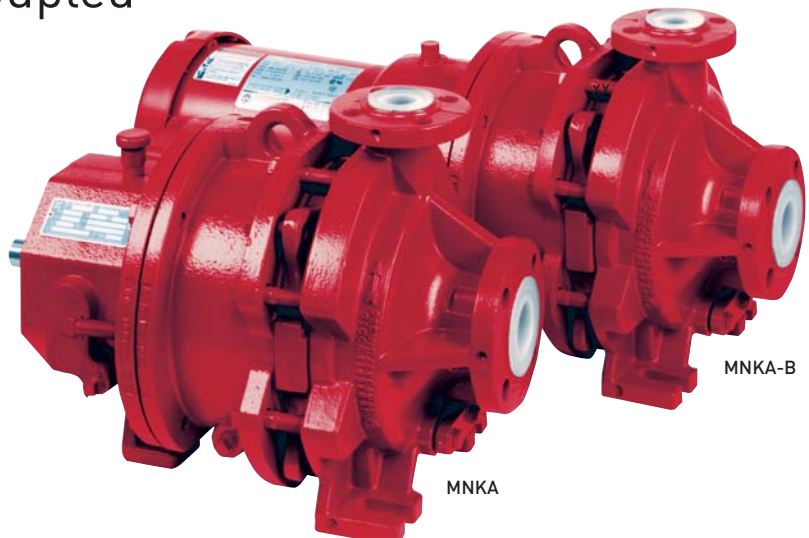

MNKA

MNKA-B

Pump dimensions for frame-mounted and close-coupled designs


Dimensions inch (mm)/Weight appr. lbs (kg)

Size*	DN _D	DN _S	Y	N	D	X	B	M ₁	A ₁	K ₁	E ₁	E ₂	T	H ₁	H ₂	F	U	V	lbs (kg)**
1 1/2 x 1 x 6"	1 (25)	1.5 (38)	4 (101.6)	13.50 (342.9)	5.25 (133.4)	6.50 (165.1)	1.97 (50)	2.60 (66)	1.42 (36)	7.97 (202.4)	6.00 (152.4)	0** (0**)	10.47 (266)	0.63 (15.9)	0.63 (15.9)	7.25 (184.2)	0.88 (22.23)	2 (50.8)	157 (71)
3 x 2 x 6"	2 (51)	3 (76)	4 (101.6)	13.50 (342.9)	5.25 (133.4)	6.50 (165.1)	1.97 (50)	3.27 (83)	1.65 (42)	7.97 (202.4)	6.00 (152.4)	0** (0**)	10.47 (266)	0.63 (15.9)	0.63 (15.9)	7.25 (184.2)	0.88 (22.23)	2 (50.8)	168 (76)
1 1/2 x 1 x 8"	1 (25)	1.5 (38)	4 (101.6)	13.50 (342.9)	5.25 (133.4)	6.50 (165.1)	1.97 (50)	2.40 (61)	1.06 (27)	7.97 (202.4)	6.00 (152.4)	0** (0**)	11.46 (291)	0.63 (15.9)	0.63 (15.9)	7.25 (184.2)	0.88 (22.23)	2 (50.8)	172 (78)
3 x 1 1/2 x 8"	1.5 (38)	3 (76)	4 (101.6)	19.49 (495.3)	8.25 (210)	8.50 (216)	2.24 (57)	2.72 (69)	1.38 (35)	11.88 (301.8)	9.75 (247.7)	7.25 (184.2)	12.60 (320)	0.63 (15.9)	0.63 (15.9)	12.5 (317.5)	1.13 (28.58)	2.63 (66.7)	243 (110)
2 x 1 x 10"	1 (25)	2 (51)	4 (101.6)	19.49 (495.3)	8.25 (210)	8.50 (216)	2.24 (57)	2.76 (70)	1.38 (35)	11.88 (301.8)	9.75 (247.7)	7.25 (184.2)	14.33 (364)	0.63 (15.9)	0.63 (15.9)	12.5 (317.5)	1.13 (28.58)	2.63 (66.7)	269 (122)

* e.g. 3" x 2" x 6" = Suction x Discharge x Impeller (in inches). Flanges ANSI B 16.5/CL.150

** Frame foot has only one mounting hole to ground on pump center line

*** Weights are for bare-shaft pump MNKA

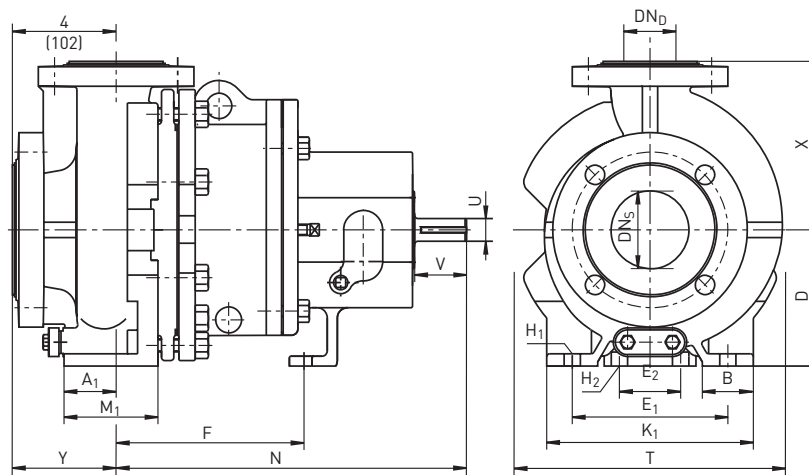


Dimensions inch (mm)

Motor frame	Group	CP (approx.)	Motor frame	Group	CP (approx.)
143TC	1	24.96 (634)	254TC	1	35.06 (891)
	2	28.73 (730)		2	37.20 (945)
145TC	1	25.96 (659)	256TC	1	36.76 (934)
	2	29.73 (755)		2	38.90 (988)
182TC	1	28.09 (713)	284TSC	1	40.95 (1040)
	2	30.23 (768)		2	43.09 (1094)
184TC	1	29.09 (739)	286TSC	1	N/A
	2	31.23 (793)		2	43.09 (1094)
213TC	1	30.89 (785)	324TSC	1	N/A
	2	33.03 (839)		2	44.91 (1141)
215TC	1	32.39 (823)	326TSC	1	N/A
	2	34.53 (877)		2	44.91 (1141)

Dimensions vary depending on motor manufacturer.

Close-coupled

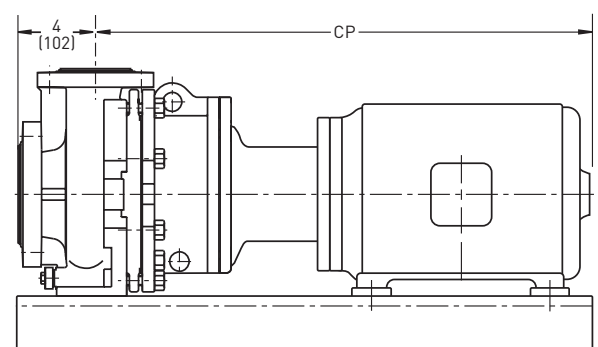





Operating range, hydraulic coverage

Operating temperature:
From -20 to 360 °F (-30 °C to 180 °C), depending on configuration and pressure.


Operating pressure:
Up to 275 psi (19 bar), depending on temperature. Pump standstill vacuum permissible depending on temperature and pump specification.

Solids containing liquids:
When solids containing media are pumped, flushing of bearings can be carried out using an external sealing liquid. This also refers to fluids which

tend to crystallize. Low solids content of small particle size can often be handled even without such ancillary equipment. Please ask for details on a case to case basis.

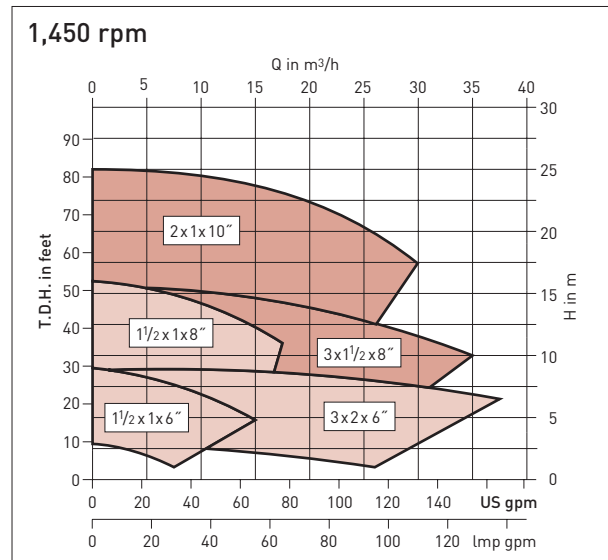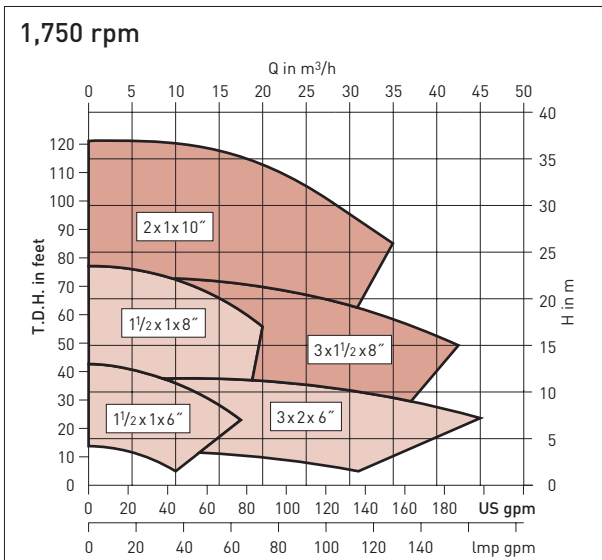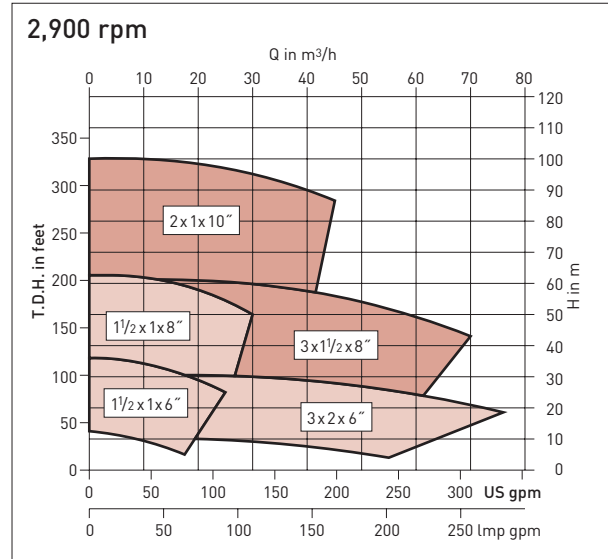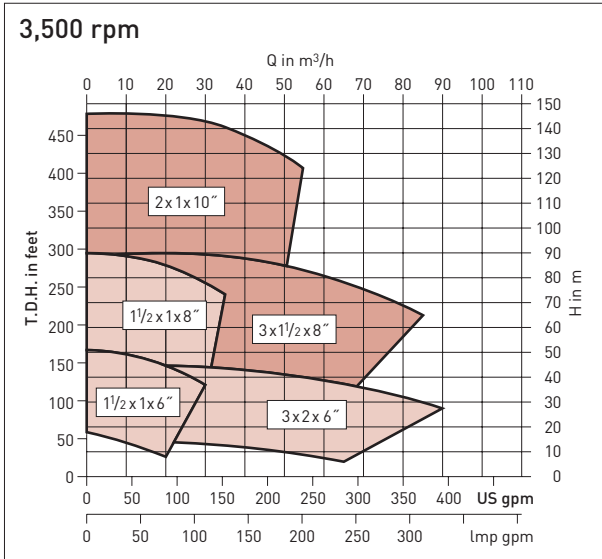

Presented by:



Richter Chemie-Technik GmbH
Otto-Schott-Str. 2
D-47906 Kempen, Germany
Tel. +49 (0) 21 52 / 146 - 0
Fax +49 (0) 21 52 / 146 - 190
richter-info@richter-ct.com
www.richter-ct.com